Division of Environmental Health and Engineering

3900 Ambassador Drive • Suite 301 • Anchorage, Alaska 99508 • Phone: (907) 729-3600 • Fax: (907) 729-4090 • www.anthc.org

April 16, 2013

The Honorable Ronnie Toolie President Native Village of Savoonga P.O. Box 120 Savoonga, AK 99769

Dear President Toolie,

Re: New Savoonga Health Clinic

I have enclosed a copy of the report prepared as part of the energy **audit** of the New Savoonga Health Clinic. The audit was prepared by the Energy Projects Group of the Department of Environmental Health and Engineering (DEHE) at the Alaska Native Tribal Health Consortium (ANTHC). Please feel free to contact me at 907-729-3543 or cremley@anthc.org if you have any questions.

Once the energy efficiency measures are implemented, the fuel and electricity costs to operate the New Savoonga Health Clinic will be reduced by approximately \$3,682 per year or 28.5% of the \$12,894 annual energy cost in 2011.

The energy audit was performed with EECBG funds provided by Department of Energy grant DE-EE0001883. We encourage the Native Village of Savoonga to implement our recommendations. If funding the implementation is a concern, you might want to apply for the next round of EECBG funding.

Sincerely,

Carl H. Remley Energy Projects Manager

Enclosure

New Savoonga Health Clinic Report

CC: Cyril Lyon, Director Plant Operations, Norton Sound Health Corporation w/enclosure Barbara Collins, Clinic Director, Norton Sound Health Corporation w/enclosure



Comprehensive Energy Audit For New Health Clinic



Prepared For

Native Village of Savoonga

March 30, 2013

Prepared By:

ANTHC 3900 Ambassador Drive, Suite 301 Anchorage, Ak 99508

Table of Contents

1. EXECUTIVE SUMMARY	
2. AUDIT AND ANALYSIS BACKGROUND	
2.1 Program Description	4
2.2 Audit Description	5
2.3. Method of Analysis	5
2.4 Limitations of Study	7
3. New Health Clinic	7
3.1. Building Description	
3.2 Predicted Energy Use	
3.2.1 Energy Usage / Tariffs	8
3.2.2 Energy Use Index (EUI)	
3.3 AkWarm© Building Simulation	
4. ENERGY COST SAVING MEASURES	13
4.1 Summary of Results	
4.2 Interactive Effects of Projects	
Appendix A – Listing of Energy Conservation and Renewable Energy Websites	

PREFACE

The Energy Projects Group at the Alaska Native Tribal Health Consortium (ANTHC) prepared this document for the Native Village of Savoonga. The authors of this report are Carl Remley, Certified Energy Auditor (CEA) and Gavin Dixon.

The purpose of this report is to provide a comprehensive document that summarizes the findings and analysis that resulted from an energy audit conducted over the past couple months by the Energy Projects Group of ANTHC. This report analyzes historical energy use and identifies costs and savings of recommended energy efficiency measures. Discussions of site specific concerns and an Energy Efficiency Action Plan are also included in this report.

ACKNOWLEDGMENTS

The Energy Projects Group gratefully acknowledges the assistance of the staff of the Health Clinic and Cedric Toolie.

1. EXECUTIVE SUMMARY

This report was prepared for the Native Village of Savoonga. The scope of the audit focused on New Health Clinic. The scope of this report is a comprehensive energy study, which included an analysis of building shell, interior and exterior lighting systems, HVAC systems, and plug loads.

Based on electricity and fuel oil prices in effect at the time of the audit, the annual predicted energy costs for the buildings analyzed are \$3,262 for Electricity and \$12,081 for #1 Oil, with total energy costs of \$15,343 per year.

It should be noted that this facility receives the power cost equalization (PCE) subsidy from the State of Alaska. If this facility had not received the PCE subsidy, total electrical costs would have been \$8,826.

Table 1.1 below summarizes the energy efficiency measures analyzed for the New Health Clinic. Listed are the estimates of the annual savings, installed costs, and two different financial measures of investment return.

		Table	2 1.1			
	P	RIORITY LIST – ENERGY	EFFICIENCY MEA	ASURES		
Rank	Feature	Improvement Description	Annual Energy Savings	Installed Cost	Savings to Investment Ratio, SIR ¹	Simple Payback (Years) ²
1	Setback Thermostat: Building was built in the 1970's	Implement a Heating Temperature Unoccupied Setback to 60.0 deg F for the Building was built in the 1970's space.	\$1,797	\$1,000	24.38	0.6
2	Ventilation	Add time clock to shut off \$706 \$1,000 HRV during unnoccupied + \$100 Maint. Hours Savings		\$1,000	10.49	1.4
3	Air Tightening	Perform air sealing to reduce air leakage by 500 cfm at 50 Pascals.	\$905	\$1,200	7.01	1.3
4	Lighting - Power Retrofit: Wall Pack	Replace with 2 LED 34W Module StdElectronic	\$117 + \$50 Maint. Savings	\$500	2.82	4.3
5	HVAC And DHW	Convert to cold boiler with outdoor reset	\$315 + \$100 Maint. Savings	\$3,000	2.32	9.5
6	Ceiling w/ Attic: Clinic	Add R-19 fiberglass batts to attic with Standard Truss.	\$303	\$4,710	1.53	15.5
	TOTAL, cost-effective measures		\$4,143 + \$250 Maint. Savings	\$11,410	5.16	2.8
	The following measures	were <i>not</i> found to be cost-eff				
7	Lighting - Combined Retrofit: Clinic Lighting	Replace with 37 LED (4) 17W Module StdElectronic and Add new Occupancy Sensor	\$126 + \$700 Maint. Savings	\$7,550	0.82	59.8
	TOTAL, all measures		\$4,269 + \$950 Maint. Savings	\$18,960	3.43	4.4

Table Notes:

¹ Savings to Investment Ratio (SIR) is a life-cycle cost measure calculated by dividing the total savings over the life of a project (expressed in today's dollars) by its investment costs. The SIR is an indication of the profitability of a measure; the higher the SIR, the more profitable the project. An SIR greater than 1.0 indicates a cost-effective project (i.e. more savings than cost). Remember that this profitability is based on the position of that Energy Efficiency Measure (EEM) in the overall list and assumes that the measures above it are implemented first.

With all of these energy efficiency measures in place, the annual utility cost can be reduced by \$4,269 per year, or 27.8% of the buildings' total energy costs. These measures are estimated to cost \$18,960, for an overall simple payback period of 4.4 years. If only the cost-effective measures are implemented, the annual utility cost can be reduced by \$4,143 per year, or 27.0% of the buildings' total energy costs. These measures are estimated to cost \$11,410, for an overall simple payback period of 2.8 years.

Table 1.2 below is a breakdown of the annual energy cost across various energy end use types, such as Space Heating and Water Heating. The first row in the table shows the breakdown for the building as it is now. The second row shows the expected breakdown of energy cost for the building assuming all of the retrofits in this report are implemented. Finally, the last row shows the annual energy savings that will be achieved from the retrofits.

	Table 1.2 Annual Energy Cost Estimate												
Description	Space Heating	Space Cooling	Water Heating	Lighting	Refrigeration	Other Electrical	Cooking	Clothes Drying	Ventilation Fans	Total Cost			
Existing Building	\$11,836	\$0	\$416	\$2,271	\$213	\$349	\$34	\$0	\$224	\$15,343			
With All Proposed Retrofits	\$8,940	\$0	\$410	\$1,055	\$213	\$349	\$34	\$0	\$73	\$11,073			
SAVINGS	\$2,896	\$0	\$6	\$1,216	\$0	\$0	\$0	\$0	\$150	\$4,269			

2. AUDIT AND ANALYSIS BACKGROUND

2.1 Program Description

This audit included services to identify, develop, and evaluate energy efficiency measures at the New Health Clinic. The scope of this project included evaluating building shell, lighting and other electrical systems, and HVAC equipment, motors and pumps. Measures were analyzed

² Simple Payback (SP) is a measure of the length of time required for the savings from an EEM to payback the investment cost, not counting interest on the investment and any future changes in energy prices. It is calculated by dividing the investment cost by the expected first-year savings of the EEM.

based on life-cycle-cost techniques, which include the initial cost of the equipment, life of the equipment, annual energy cost, annual maintenance cost, and a discount rate of 3.0%/year in excess of general inflation.

2.2 Audit Description

Preliminary audit information was gathered in preparation for the site survey. The site survey provides critical information in deciphering where energy is used and what opportunities exist within a building. The entire site was surveyed to inventory the following to gain an understanding of how each building operates:

- Building envelope (roof, windows, etc.)
- Heating, ventilation, and air conditioning equipment (HVAC)
- Lighting systems and controls
- Building-specific equipment
- Water consumption, treatment (optional) & disposal

The building site visit was performed to survey all major building components and systems. The site visit included detailed inspection of energy consuming components. Summary of building occupancy schedules, operating and maintenance practices, and energy management programs provided by the building manager were collected along with the system and components to determine a more accurate impact on energy consumption.

Details collected from New Health Clinic enable a model of the building's energy usage to be developed, highlighting the building's total energy consumption, energy consumption by specific building component, and equivalent energy cost. The analysis involves distinguishing the different fuels used on site, and analyzing their consumption in different activity areas of the building.

New Health Clinic is classified as being made up of the following activity areas:

1) Building was built in the 1970's: 2,048 square feet

In addition, the methodology involves taking into account a wide range of factors specific to the building. These factors are used in the construction of the model of energy used. The factors include:

- Occupancy hours
- Local climate conditions
- Prices paid for energy

2.3. Method of Analysis

Data collected was processed using AkWarm© Energy Use Software to estimate energy savings for each of the proposed energy efficiency measures (EEMs). The recommendations focus on the building envelope; HVAC; lighting, plug load, and other electrical improvements; and motor and pump systems that will reduce annual energy consumption.

EEMs are evaluated based on building use and processes, local climate conditions, building construction type, function, operational schedule, existing conditions, and foreseen future plans. Energy savings are calculated based on industry standard methods and engineering estimations.

Our analysis provides a number of tools for assessing the cost effectiveness of various improvement options. These tools utilize **Life-Cycle Costing**, which is defined in this context as a method of cost analysis that estimates the total cost of a project over the period of time that includes both the construction cost and ongoing maintenance and operating costs.

Savings to Investment Ratio (SIR) = Savings divided by Investment

Savings includes the total discounted dollar savings considered over the life of the improvement. When these savings are added up, changes in future fuel prices as projected by the Department of Energy are included. Future savings are discounted to the present to account for the time-value of money (i.e. money's ability to earn interest over time). The **Investment** in the SIR calculation includes the labor and materials required to install the measure. An SIR value of at least 1.0 indicates that the project is cost-effective—total savings exceed the investment costs.

Simple payback is a cost analysis method whereby the investment cost of a project is divided by the first year's savings of the project to give the number of years required to recover the cost of the investment. This may be compared to the expected time before replacement of the system or component will be required. For example, if a boiler costs \$12,000 and results in a savings of \$1,000 in the first year, the payback time is 12 years. If the boiler has an expected life to replacement of 10 years, it would not be financially viable to make the investment since the payback period of 12 years is greater than the project life.

The Simple Payback calculation does not consider likely increases in future annual savings due to energy price increases. As an offsetting simplification, simple payback does not consider the need to earn interest on the investment (i.e. it does not consider the time-value of money). Because of these simplifications, the SIR figure is considered to be a better financial investment indicator than the Simple Payback measure.

Measures are implemented in order of cost-effectiveness. The program first calculates individual SIRs, and ranks all measures by SIR, higher SIRs at the top of the list. An individual measure must have an individual SIR>=1 to make the cut. Next the building is modified and resimulated with the highest ranked measure included. Now all remaining measures are reevaluated and ranked, and the next most cost-effective measure is implemented. AkWarm goes through this iterative process until all appropriate measures have been evaluated and installed.

It is important to note that the savings for each recommendation is calculated based on implementing the most cost effective measure first, and then cycling through the list to find the next most cost effective measure. Implementation of more than one EEM often affects the savings of other EEMs. The savings may in some cases be relatively higher if an individual EEM is implemented in lieu of multiple recommended EEMs. For example implementing a reduced

operating schedule for inefficient lighting will result in relatively high savings. Implementing a reduced operating schedule for newly installed efficient lighting will result in lower relative savings, because the efficient lighting system uses less energy during each hour of operation. If multiple EEM's are recommended to be implemented, AkWarm calculates the combined savings appropriately.

Cost savings are calculated based on estimated initial costs for each measure. Installation costs include labor and equipment to estimate the full up-front investment required to implement a change. Costs are derived from Means Cost Data, industry publications, and local contractors and equipment suppliers.

2.4 Limitations of Study

All results are dependent on the quality of input data provided, and can only act as an approximation. In some instances, several methods may achieve the identified savings. This report is not intended as a final design document. The design professional or other persons following the recommendations shall accept responsibility and liability for the results.

3. New Health Clinic

3.1. Building Description

The 2,048 square foot New Health Clinic was constructed in 1970, with a normal occupancy of 3 people. The number of hours of operation for this building average 7.9 hours per day, considering all seven days of the week.

The building is of wood frame construction and T1-11 siding. Although it has been well taken care of, it's life is limited due to the harsh Savoonga weather.

Description of Building Shell

The exterior walls are 2x6 construction with R-19 fiberglass batt insulation.

The roof of the building is a cold roof with 12 inches of R-38 fiberglass batt insulation.

The floor of the building is built with a leaky crawlspace with six inches of R-19 fiberglass batt insulation.

Typical windows throughout the building are double paned glass windows with vinyl frames.

Doors are metal with an EPS core.

Description of Heating Plants

The Heating Plants used in the building are:

Boiler - Weil McLain Gold WTGO-6

Nameplate Information: Weil McLain - GOLD P WTGO-6

Fuel Type: #1 Oil

Input Rating: 212,000 BTU/hr

Steady State Efficiency: 87 %
Idle Loss: 1 %
Heat Distribution Type: Glycol
Boiler Operation: Sep - Jun

Space Heating Distribution Systems

The clinic is hydronically heated with several zones. Testing during the audit indicated that the individual zone controls were operational.

Domestic Hot Water System

A 41 gallon Amtrol hot water tank is heated off the boiler. The facility uses about 20 gallons of hot water a day.

Description of Building Ventilation System

A Venmar HRV system currently runs 24 hours per day, seven days a week, recovering heat from the facility at about 60% efficiency and moving 120 CFM of outside air.

Lighting

Interior lighting is made up of electronic ballast T8 fluorescent lighting with 32 watt bulbs. Exterior lighting is made up of a pair of metal halide 70 watt fixtures.

Plug Loads

A few computers and various office equipment, a coffee pot, two refrigerators, and various medical equipment make up the plug loads in the facility.

3.2 Predicted Energy Use

3.2.1 Energy Usage / Tariffs

The electric usage profile charts (below) represents the predicted electrical usage for the building. If actual electricity usage records were available, the model used to predict usage was calibrated to approximately match actual usage. The electric utility measures consumption in kilowatt-hours (kWh) and maximum demand in kilowatts (kW). One kWh usage is equivalent to 1,000 watts running for one hour.

The fuel oil usage profile shows the fuel oil usage for the building. Fuel oil consumption is measured in gallons. One gallon of #1 Fuel Oil provides approximately 132,000 BTUs of energy.

The following is a list of the utility companies providing energy to the building and the class of service provided:

Electricity: AVEC-Savoonga - Commercial - Sm

The average cost for each type of fuel used in this building is shown below in Table 3.1. This figure includes all surcharges, subsidies, and utility customer charges:

Table 3.1 - Average Energy Cost							
Description	Average Energy Cost						
Electricity	\$ 0.17/kWh						
#1 Oil	\$ 6.71/gallon						

3.2.1.1 Total Energy Use and Cost Breakdown

At current rates, Native Village of Savoonga pays approximately \$15,343 annually for electricity and other fuel costs for the New Health Clinic.

Figure 3.1 below reflects the estimated distribution of costs across the primary end uses of energy based on the AkWarm© computer simulation. Comparing the "Retrofit" bar in the figure to the "Existing" bar shows the potential savings from implementing all of the energy efficiency measures shown in this report.

Figure 3.1
Annual Energy Costs by End Use

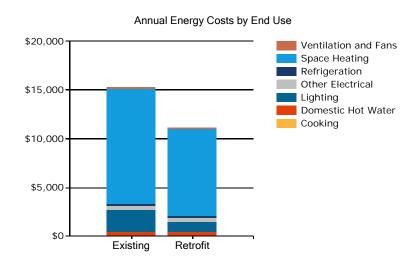


Figure 3.2 below shows how the annual energy cost of the building splits between the different fuels used by the building. The "Existing" bar shows the breakdown for the building as it is now; the "Retrofit" bar shows the predicted costs if all of the energy efficiency measures in this report are implemented.

Figure 3.2
Annual Energy Costs by Fuel Type


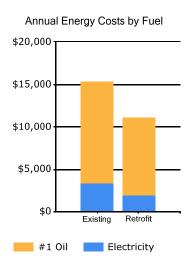


Figure 3.3 below addresses only Space Heating costs. The figure shows how each heat loss component contributes to those costs; for example, the figure shows how much annual space heating cost is caused by the heat loss through the Walls/Doors. For each component, the space heating cost for the Existing building is shown (blue bar) and the space heating cost assuming all retrofits are implemented (yellow bar) are shown.

Figure 3.3
Annual Space Heating Cost by Component

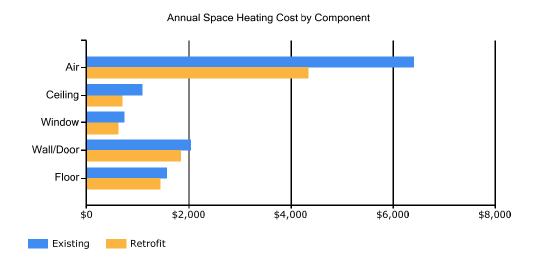

The tables below show AkWarm's estimate of the monthly fuel use for each of the fuels used in the building. For each fuel, the fuel use is broken down across the energy end uses. Note, in the tables below "DHW" refers to Domestic Hot Water heating.

Electrical Consu	Electrical Consumption (kWh)												
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sept	Oct	Nov	Dec	
Lighting	1134	1033	1134	1097	1134	1097	1134	1134	1097	1134	1097	1134	
Refrigeration	106	97	106	103	106	103	106	106	103	106	103	106	
Other_Electrical	174	159	174	168	174	168	174	174	168	174	168	174	
Cooking	17	15	17	16	17	16	17	17	16	17	16	17	
Ventilation_Fans	112	102	112	108	112	108	112	112	108	112	108	112	
DHW	0	0	0	0	1	0	0	0	1	0	0	0	
Space_Heating	92	84	91	85	83	75	76	77	79	86	87	92	

Fuel Oil #1 Cons	Fuel Oil #1 Consumption (Gallons)											
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sept	Oct	Nov	Dec
DHW	5	5	5	5	6	5	5	5	6	5	5	5
Space_Heating	250	229	225	164	91	44	32	38	77	141	198	249

3.2.2 Energy Use Index (EUI)

Energy Use Index (EUI) is a measure of a building's annual energy utilization per square foot of building. This calculation is completed by converting all utility usage consumed by a building for one year, to British Thermal Units (Btu) or kBtu, and dividing this number by the building square footage. EUI is a good measure of a building's energy use and is utilized regularly for comparison of energy performance for similar building types. The Oak Ridge National Laboratory (ORNL) Buildings Technology Center under a contract with the U.S. Department of Energy maintains a Benchmarking Building Energy Performance Program. The ORNL website determines how a building's energy use compares with similar facilities throughout the U.S. and in a specific region or state.

Source use differs from site usage when comparing a building's energy consumption with the national average. Site energy use is the energy consumed by the building at the building site only. Source energy use includes the site energy use as well as all of the losses to create and distribute the energy to the building. Source energy represents the total amount of raw fuel that is required to operate the building. It incorporates all transmission, delivery, and production losses, which allows for a complete assessment of energy efficiency in a building. The type of utility purchased has a substantial impact on the source energy use of a building. The EPA has determined that source energy is the most comparable unit for evaluation purposes and overall global impact. Both the site and source EUI ratings for the building are provided to understand and compare the differences in energy use.

The site and source EUIs for this building are calculated as follows. (See Table 3.4 for details):

Building Site EUI = (Electric Usage in kBtu + Fuel Oil Usage in kBtu + similar for other fuels)

Building Square Footage

Building Source EUI = (Electric Usage in kBtu X SS Ratio + Fuel Oil Usage in kBtu X SS Ratio + similar for other fuels)

Building Square Footage

where "SS Ratio" is the Source Energy to Site Energy ratio for the particular fuel.

Table 3.4 New Health Clinic EUI Calculations

Energy Type	Building Fuel Use per Year	Site Energy Use per Year, kBTU	Source/Site Ratio	Source Energy Use per Year, kBTU					
Electricity	19,188 kWh	65,490	3.340	218,737					
#1 Oil	1,800 gallons	237,653	1.010	240,029					
Total		303,143		458,766					
BUILDING AREA		2,048	Square Feet						
BUILDING SITE EUI		148	kBTU/Ft²/Yr						
BUILDING SOURCE EUI 224 kBTU/Ft²/Yr									
* Site - Source Ratio d	lata is provided by the Energy S	tar Performance Ratir	ng Methodology	for Incorporating					

^{*} Site - Source Ratio data is provided by the Energy Star Performance Rating Methodology for Incorporating Source Energy Use document issued March 2011.

3.3 AkWarm© Building Simulation

An accurate model of the building performance can be created by simulating the thermal performance of the walls, roof, windows and floors of the building. The HVAC system and central plant are modeled as well, accounting for the outside air ventilation required by the building and the heat recovery equipment in place.

The model uses local weather data and is trued up to historical energy use to ensure its accuracy. The model can be used now and in the future to measure the utility bill impact of all types of energy projects, including improving building insulation, modifying glazing, changing air handler schedules, increasing heat recovery, installing high efficiency boilers, using variable air volume air handlers, adjusting outside air ventilation and adding cogeneration systems.

For the purposes of this study, the New Health Clinic was modeled using AkWarm© energy use software to establish a baseline space heating and cooling energy usage. Climate data from Savoonga was used for analysis. From this, the model was be calibrated to predict the impact of theoretical energy savings measures. Once annual energy savings from a particular measure were predicted and the initial capital cost was estimated, payback scenarios were approximated. Equipment cost estimate calculations are provided in Appendix D.

Limitations of AkWarm© Models

- The model is based on typical mean year weather data for Savoonga. This data represents the average ambient weather profile as observed over approximately 30 years. As such, the gas and electric profiles generated will not likely compare perfectly with actual energy billing information from any single year. This is especially true for years with extreme warm or cold periods, or even years with unexpectedly moderate weather.
- The heating and cooling load model is a simple two-zone model consisting of the building's core interior spaces and the building's perimeter spaces. This simplified approach loses accuracy for buildings that have large variations in cooling/heating loads across different parts of the building.

• The model does not model HVAC systems that simultaneously provide both heating and cooling to the same building space (typically done as a means of providing temperature control in the space).

The energy balances shown in Section 3.1 were derived from the output generated by the AkWarm© simulations.

4. ENERGY COST SAVING MEASURES

4.1 Summary of Results

The energy saving measures are summarized in Table 4.1. Please refer to the individual measure descriptions later in this report for more detail. Calculations and cost estimates for analyzed measures are provided in Appendix C.

		Table New Health Clinic,		ca		
	Р	RIORITY LIST – ENERGY				
Rank	Feature	Improvement Description	Annual Energy Savings	Installed Cost	Savings to Investment Ratio, SIR	Simple Payback (Years)
1	Setback Thermostat: Building was built in the 1970's	Implement a Heating Temperature Unoccupied Setback to 60.0 deg F for the Building was built in the 1970's space.	\$1,797	\$1,000	24.38	0.6
2	Ventilation	Add time clock to shut off HRV during unnoccupied Hours	\$706 + \$100 Maint. Savings	\$1,000	10.49	1.4
3	Air Tightening	Perform air sealing to reduce air leakage by 500 cfm at 50 Pascals.	\$905	\$1,200	7.01	1.3
4	Lighting - Power Retrofit: Wall Pack	Replace with 2 LED 34W Module StdElectronic	\$117 + \$50 Maint. Savings	\$500	2.82	4.3
5	HVAC And DHW	Convert to cold boiler with outdoor reset	\$315 + \$100 Maint. Savings	\$3,000	2.32	9.5
6	Ceiling w/ Attic: Clinic	Add R-19 fiberglass batts to attic with Standard Truss.	\$303	\$4,710	1.53	15.5
	TOTAL, cost-effective measures		\$4,143 + \$250 Maint. Savings	\$11,410	5.16	2.8
		were <i>not</i> found to be cost-eff				
7	Lighting - Combined Retrofit: Clinic Lighting	Replace with 37 LED (4) 17W Module StdElectronic and Add new Occupancy Sensor	\$126 + \$700 Maint. Savings	\$7,550	0.82	59.8
	TOTAL, all measures		\$4,269 + \$950 Maint. Savings	\$18,960	3.43	4.4

4.2 Interactive Effects of Projects

The savings for a particular measure are calculated assuming all recommended EEMs coming before that measure in the list are implemented. If some EEMs are not implemented, savings for the remaining EEMs will be affected. For example, if ceiling insulation is not added, then savings from a project to replace the heating system will be increased, because the heating system for the building supplies a larger load.

In general, all projects are evaluated sequentially so energy savings associated with one EEM would not also be attributed to another EEM. By modeling the recommended project sequentially, the analysis accounts for interactive affects among the EEMs and does not "double count" savings.

Interior lighting, plug loads, facility equipment, and occupants generate heat within the building. When the building is in cooling mode, these items contribute to the overall cooling demands of the building; therefore, lighting efficiency improvements will reduce cooling requirements in air-conditioned buildings. Conversely, lighting-efficiency improvements are anticipated to slightly increase heating requirements. Heating penalties and cooling benefits were included in the lighting project analysis.

4.3 Building Shell Measures

4.3.1 Insulation Measures

Rank	Location		Existing Type/R-Value		Recommendation Type/R-Value			
6	Ceiling w/ A	Attic: Clinic	Framing Type: Standard Framing Spacing: 24 inches Insulated Sheathing: None Bottom Insulation Layer: R-38 Batt:F inches Top Insulation Layer: None Modeled R-Value: 36.9	G or RW, 12	Add R-19 fiberglass batts to a	ittic with Standard Truss.		
Installat	tion Cost	\$4,	710 Estimated Life of Measure (yrs)	30	Energy Savings (/yr)	\$303		
Breakev	Breakeven Cost \$		188 Savings-to-Investment Ratio	1.5	Simple Payback yrs	16		
Auditors	s Notes:							

4.3.2 Air Sealing Measures

Rank	Location		Existing Air Leakage Level (cfm@50/	/75 Pa)	Red	commended Air Leakage Reduction (cfm@50/75 Pa)			
3			Air Tightness from Blower Door Test: 2915 cfm at 50			Perform air sealing to reduce air leakage by 500 cfm			
			Pascals		at 50 Pascals.				
Installation Cost \$1		\$1,20	00 Estimated Life of Measure (yrs)		10	Energy Savings (/yr)	\$905		
Breakev	en Cost	\$8,41	13 Savings-to-Investment Ratio		7.0	Simple Payback yrs	1		
Auditors	Notes: - Red	commend Seal	off old dryer vent						
- Recom	- Recommend Seal off old Mannual trans for switch and leaks to panel in Kitchen								
- Recommend Seal Boiler Room Door and main entrance door or replace (Because of Gaps)									

4.4 Mechanical Equipment Measures

4.4.1 Heating/Domestic Hot Water Measure

Rank	Recommen	dation								
5	Convert to o	Convert to cold boiler with outdoor reset								
Installation Cost		\$3,000	Estimated Life of Measure (yrs)	20	Energy Savings (/yr)	\$315				
					Maintenance Savings (/yr)	\$100				
Breakev	en Cost	\$6,972	Savings-to-Investment Ratio	2.3	Simple Payback yrs	10				
This con	version will re	equire the additio	n of a Tekmar controller with cold	start, set-back, a	nd outdoor reset capability.					

4.4.2 Ventilation System Measures

Rank	Description			Recommen	Recommendation					
2				Add time cl	Add time clock to shut off HRV during unnoccupied Hours					
Installation Cost		\$1,000	Estimated Life of Measure (yrs)	15	Energy Savings (/yr)	\$706				
					Maintenance Savings (/yr)	\$100				
Breakev	Breakeven Cost \$10,494 Savings-to-Investment Ratio				Simple Payback yrs	1				
Auditors	Auditors Notes: HRV should only operate when the facility is occupied. A timing device of some sort needs to be added to allow this.									

4.4.3 Night Setback Thermostat Measures

Rank	Building Space			Recommen	Recommendation			
1	Building was built in the 1970's			Implement	Implement a Heating Temperature Unoccupied Setback to 60.0			
	deg F for the Building was built in the 1970's spac				e 1970's space.			
Installation Cost		\$1,000	Estimated Life of Measure (yrs)	15	Energy Savings (/yr)	\$1,797		
Breakeven Cost		\$24,383	Savings-to-Investment Ratio	24.4	Simple Payback yrs	1		
Auditors Notes: Installing a setback thermostat to maintain the temperature of the facility to only 60 degrees, as opposed to 70, when the facility is unoccupied on nights and weekends, will save substantial amount of fuel.								

4.5 Electrical & Appliance Measures

4.5.1 Lighting Measures

The goal of this section is to present any lighting energy conservation measures that may also be cost beneficial. It should be noted that replacing current bulbs with more energy-efficient equivalents will have a small effect on the building heating and cooling loads. The building cooling load will see a small decrease from an upgrade to more efficient bulbs and the heating load will see a small increase, as the more energy efficient bulbs give off less heat.

4.5.1a Lighting Measures – Replace Existing Fixtures/Bulbs

Rank	Location	E	Existing Condition			Recommendation		
4	Wall Pack	2	2 MH 70 Watt Electronic with Daylight Sensor			Replace with 2 LED 34W Module Electronic		
Installation Cost		\$500 Estimated Life of Measure (yrs)		1	.0 E	Energy Savings (/yr)		
					N	Maintenance Savings (/yr)	\$50	
Breakeven Cost		\$1,412	Savings-to-Investment Ratio	2.	.8 S	Simple Payback yrs	4	
Auditors Notes: Replacing exterior lighting with LED lighting will reduce electrical use, reduce bulb replacement, and allow for better function in the cold.								

Rank	Location		Existing Condition Re		Reco	Recommendation		
7	Clinic Lighting		37 FLUOR (4) T8 4' F32T8 32W Standard Instant			Replace with 37 LED (4) 17W Module Electronic and		
			Electronic with Manual Switching		.	Add new Occupancy Sensor		
Installation Cost		\$7,55	50 Estimated Life of Measure (yrs)	1	10	Energy Savings (/yr)	\$126	
						Maintenance Savings (/yr)	\$700	
Breakeven Cost		\$6,18	Savings-to-Investment Ratio	0).8	Simple Payback yrs	60	
Auditors Notes: Replacing interior lighting with LED lighting will reduce electrical use, reduce bulb replacement, and allow for better function in								

Auditors Notes: Replacing interior lighting with LED lighting will reduce electrical use, reduce bulb replacement, and allow for better function in the cold.

5. ENERGY EFFICIENCY ACTION PLAN

Through inspection of the energy-using equipment on-site and discussions with site facilities personnel, this energy audit has identified several energy-saving measures. The measures will reduce the amount of fuel burned and electricity used at the site. The projects will not degrade the performance of the building and, in some cases, will improve it.

Several types of EEMs can be implemented immediately by building staff, and others will require various amounts of lead time for engineering and equipment acquisition. In some cases, there are logical advantages to implementing EEMs concurrently. For example, if the same electrical contractor is used to install both lighting equipment and motors, implementation of these measures should be scheduled to occur simultaneously.

Appendix A – Listing of Energy Conservation and Renewable Energy Websites

Lighting

Illumination Engineering Society - http://www.iesna.org/

Energy Star Compact Fluorescent Lighting Program - www.energystar.gov/index.cfm?c=cfls.pr_cfls

DOE Solid State Lighting Program - http://www1.eere.energy.gov/buildings/ssl/

DOE office of Energy Efficiency and Renewable Energy - http://apps1.eere.energy.gov/consumer/your workplace/

Energy Star - http://www.energystar.gov/index.cfm?c=lighting.pr lighting

Hot Water Heaters

Heat Pump Water Heaters -

http://apps1.eere.energy.gov/consumer/your home/water heating/index.cfm/mytopic=12840

Solar Water Heating

FEMP Federal Technology Alerts - http://www.eere.energy.gov/femp/pdfs/FTA solwat heat.pdf

Solar Radiation Data Manual – http://rredc.nrel.gov/solar/pubs/redbook

Plug Loads

DOE office of Energy Efficiency and Renewable Energy – http:apps1.eere.energy.gov/consumer/your-workplace/

Energy Star – http://www.energystar.gov/index.cfm?fuseaction=find a product

The Greenest Desktop Computers of 2008 - http://www.metaefficient.com/computers/the-greenest-pcs-of-2008.html

Wind

AWEA Web Site - http://www.awea.org

National Wind Coordinating Collaborative – http://www.nationalwind.org

Utility Wind Interest Group site: http://www.uwig.org

WPA Web Site – http://www.windpoweringamerica.gov

Homepower Web Site: http://homepower.com

Windustry Project: http://www.windustry.com

Solar

NREL - http://www.nrel.gov/rredc/

Firstlook – http://firstlook.3tiergroup.com

TMY or Weather Data – http://rredc.nrel.gov/solar/old-data/nsrdb/1991-2005/tmy3/

State and Utility Incentives and Utility Policies - http://www.dsireusa.org