



Investigative Energy Audit For

Gulkana Shop



Prepared For
Gulkana Village

November 20, 2017

Prepared By: Kevin Ulrich, CEM

**ANTHC-DEHE
4500 Diplomacy Drive
Anchorage, AK 99508**

Table of Contents

PREFACE	2
ACKNOWLEDGMENTS.....	2
OVERVIEW.....	3
ENERGY BASELINE	3
PROPOSED ENERGY EFFICIENCY MEASURES (EEM).....	3
FACILITY DESCRIPTION	4
PROJECT FINANCING	5
MEASUREMENT AND VERIFICATION	6
Appendix A –Energy Billing Data.....	7
Appendix B – Energy Audit Report – Project Summary	8
Appendix C – Actual Fuel Use versus Modeled Fuel Use	9
Appendix D - EUI Calculation Details	11
Appendix E – Materials List and Labor Estimation.....	12
Appendix F – Materials Specifications	13

PREFACE

The purpose of this report is to provide guidance in reducing facility operating costs and enhance the sustainability of this community. The report assesses the current energy usage of the facility, provide options for reducing the amount of energy used, and evaluate the cost vs. benefit of each option.

Discussions of site specific concerns, financing options, general facility information, and an Energy Efficiency Action Plan are also included in this report.


ACKNOWLEDGMENTS

The Rural Energy Initiative gratefully acknowledges the assistance of Gulkana Tribal Administrator Angela Vermillion, Tribal Clerk Amanda Maxim, and Village Maintenance Person Ray Spear.

OVERVIEW

This report was prepared for Gulkana Village. The scope of the audit focused on the Gulkana Shop and includes an analysis of building occupancy schedules, building shell, heating systems, heating and ventilations systems, domestic hot water, lighting, and other electrical loads. The Gulkana shop has an area of approximately 1,157 square feet and serves as a shop space and equipment storage for the Gulkana Village

Annual Energy Costs by Fuel Type

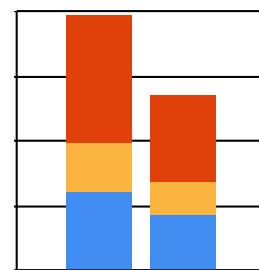

ENERGY BASELINE

Based on unsubsidized electricity and fuel oil prices in effect at the time of the audit, the total predicted energy costs are \$3,928 per year. This includes \$1,212 for electricity, \$772 for #1 fuel oil, and \$1,945 for wood.

Table 1 lists the predicted annual energy usage before and after the proposed retrofits for the Gulkana Shop.

Table 1: Predicted Annual Energy Use for the Gulkana Shop

Predicted Annual Fuel Use				
Fuel Use	Existing Building	With Proposed Retrofits	Total Energy Savings	Total Cost Savings
Electricity	4,214 kWh	2,692 kWh	1,522 kWh	\$350
#1 Oil	327 gallons	221 gallons	106 gallons	\$250
Spruce Wood	7.78 cords	5.26 cords	2.52 cords	\$630

PROPOSED ENERGY EFFICIENCY MEASURES (EEM)

Table 2 below summarizes the energy efficiency measures analyzed for the Gulkana Shop. Listed are the estimates of the annual savings, installed costs, and two different financial measures of investment return. All costs assume that local labor will be used with no additional cost associated for travel or administrative tasks.

Table 2: Priority List – Energy Efficiency Measures

Priority	Feature	Improvement Description	Annual Energy Savings	Installed Cost	Savings to Investment Ratio, SIR ¹	Simple Payback (Years) ²	CO ₂ Savings
High	Setback Thermostat: Shop	Install a programmable thermostat and implement an unoccupied setback temperature of 50 deg. F.	\$849	\$1,000	10.51	1.2	2,285.4
High	Lighting: Tool Storage Room	Replace with new energy-efficient direct-wire LED equivalent lamps.	\$56	\$240	2.67	4.3	486.0
Medium	Lighting: Main Bay	Replace with new energy-efficient direct-wire LED equivalent lamps.	\$84	\$360	1.93	4.3	729.0

Priority	Feature	Improvement Description	Annual Energy Savings	Installed Cost	Savings to Investment Ratio, SIR ¹	Simple Payback (Years) ²	CO ₂ Savings
Medium	Lighting: Loft	Replace with new energy-efficient direct-wire LED equivalent lamps and turn off light when space is unoccupied.	\$85	\$560	1.75	6.6	740.4
Low	Lighting: Storage Area	Replace with new energy-efficient direct-wire LED equivalent lamps.	\$1	\$30	0.43	26.6	9.8
Low	Air Tightening	Weatherize around garage door and front door entrance.	\$31	\$1,000	0.27	32.1	84.0
Low	Wall Insulation	Add rigid foam to interior of existing wall.	\$126	\$9,934	0.26	78.9	338.9
Low	Lighting: Bench	Replace with new energy-efficient direct-wire LED equivalent lamps.	\$0	\$60	0.05	233.8	2.2
TOTAL			\$1,232	\$13,184	1.19	10.7	4,675.8

FACILITY DESCRIPTION

Building Occupancy Schedules

The building is occupied at the beginning and end of a standard work day as well as periodically throughout the day as the village maintenance personnel return to the shop to retrieve, store, or work on equipment. The maintenance personnel hours are 8:00 AM – 5:00 PM and the occupancy of the building is based around these times.

Building Shell

The building is constructed with metal siding and framing with fiberglass batt insulation. The building is built on a gravel pad foundation with natural ground as the floor. There are no windows in the building. There is a single door entrance and a 12' x 12'6" garage door.

Heating Systems

The heating systems used in the building are:

Oil-fired Unit Heater

Fuel Type:	#1 Oil
Input Rating:	115,000 BTU/hr
Steady State Efficiency:	80 %
Idle Loss:	0 %
Heat Distribution Type:	Air

Biomass Heat

Fuel Type:	Spruce Wood
------------	-------------

Input Rating:	177,000 BTU/hr
Steady State Efficiency:	75 %
Idle Loss:	0 %
Heat Distribution Type:	Glycol
Boiler Operation:	All Year

Lighting

Table 3: Lighting Information in the Gulkana Shop

Room	Lamp Type	Fixtures	Lamps per Fixture	Annual Usage (kWh)
Tool Storage Room	Fluorescent T12 4ft. 40 Watt	4	2	786
Main Bay	Fluorescent T12 4ft. 40 Watt	6	2	1,178
Loft	Fluorescent T12 4ft. 40 Watt	1	2	633
Storage Area	CFL Spiral 42 Watt	1	1	11
Bench	Fluorescent T12 4ft. 40 Watt	1	2	5
Mobile Shop Lights	Incandescent A Lamp 300 Watt	1	1	24

Electrical Equipment

Table 4: Major Electrical Equipment in the Gulkana Shop

Equipment	Rating (Watts)	Annual Usage (kWh)
Loft Fan	250	130
Chop Saw	1,640	64
Air Compressor	4,800	376
Old Minifridge	30	263
Flashlight Charger	24	94
Cordless Tool Battery Chargers (3)	20 each	235

PROJECT FINANCING

The total estimated cost of the recommended EEM's \$13,184. The payback for the implemented EEM's is approximately 10.7 years. ANTHC is willing to assist the community with acquiring funds to complete the scope of work recommended in this energy audit.

There are several options for financing energy efficiency projects within the State of Alaska. These include the use of grants, loans, and other funding opportunities. Below is some information on potential funding opportunities.

Energy Efficiency Revolving Loan Program – This is a loan administered by the Alaska Housing Finance Corporation (AHFC) for use by any applicant who is also the owner of the building where the work will take place. It provides a loan for permanent energy-efficiency projects with a completion window of one year.

Sustainable Energy Transmission and Supply Program – This is a loan administered by the Alaska Energy Authority (AEA) for a government, business, or other organized body of people. It provides a loan for energy-efficiency or power transmission or distribution projects.

USDA-RD Communities Facilities Direct Loan & Grant Program - This is a loan or grant provided by the US Department of Agriculture – Rural Development (USDA-RD) for any essential community facility in a rural area. It provides a loan or grant to develop essential community facilities with upgrades or equipment for improvement.

MEASUREMENT AND VERIFICATION

The results of these recommended measures can be measured through the collection of energy use data through the monthly bills provided by the local electric utility and the local fuel oil supplier. Collecting data and performing a historical comparison is the simplest method of validating the energy and cost savings seen by the measures. Additionally, active remote monitoring systems are available that can collect and store data regarding energy and fuel usage. These systems allow the user to track the usage in real time and can be shared more easily with partners across the state.

APPENDICES

Appendix A -Energy Billing Data

The table below shows the fuel and electricity data used during the energy modeling process to confirm the accuracy of the energy distribution.

Month	Fuel Oil Use (gallons)	Electricity Use (kWh)
January	65	695
February	50	657
March	35	702
April	25	605
May	0	361
June	0	197
July	0	239
August	0	185
September	15	67
October	30	72
November	45	66
December	65	406

Appendix B – Energy Audit Report – Project Summary

ENERGY AUDIT REPORT – PROJECT SUMMARY	
General Project Information	
PROJECT INFORMATION	AUDITOR INFORMATION
Building: Gulkana Shop	Auditor Company: ANTHC-DEHE
Address: PO Box 254	Auditor Name: Kevin Ulrich
City: Gulkana	Auditor Address: 4500 Diplomacy Drive
Client Name: Ray Spear	Anchorage, AK 99508
Client Address: P.O. Box 254 Gulkana, AK 99586	Auditor Phone: (907) 729-3237
Client Phone: (907) 259-3740	Auditor FAX:
Client FAX:	Auditor Comment:
Design Data	
Building Area: 1,157 square feet	Design Space Heating Load: Design Loss at Space: 49,027 Btu/hour with Distribution Losses: 49,027 Btu/hour Plant Input Rating assuming 82.0% Plant Efficiency and 25% Safety Margin: 74,736 Btu/hour Note: Additional Capacity should be added for DHW and other plant loads, if served.
Typical Occupancy: 2 people	Design Indoor Temperature: 65 deg F (building average)
Actual City: Gulkana	Design Outdoor Temperature: -39.4 deg F
Weather/Fuel City: Gulkana	Heating Degree Days: 13,439 deg F-days
Utility Information	
Electric Utility: Copper Valley Electric Association	Average Annual Cost/kWh: \$0.29/kWh

Annual Energy Cost Estimate				
Description	Space Heating	Lighting	Other Electrical	Total Cost
Existing Building	\$2,813	\$608	\$268	\$3,928
With Proposed Retrofits	\$1,901	\$288	\$268	\$2,696
Savings	\$912	\$320	\$0	\$1,232


Building Benchmarks			
Description	EUI (kBtu/Sq.Ft.)	EUI/HDD (Btu/Sq.Ft./HDD)	ECI (\$/Sq.Ft.)
Existing Building	171.5	12.76	\$3.40
With Proposed Retrofits	115.4	8.59	\$2.33

EUI: Energy Use Intensity - The annual site energy consumption divided by the structure's conditioned area.
EUI/HDD: Energy Use Intensity per Heating Degree Day.
ECI: Energy Cost Index - The total annual cost of energy divided by the square footage of the conditioned space in the building.


Appendix C – Actual Fuel Use versus Modeled Fuel Use

The graphs below show the modeled energy usage results of the energy audit process compared to the actual energy usage report data. The model was completed using AkWarm modeling software. The orange bars show actual fuel use, and the blue bars are AkWarm's prediction of fuel use.


Annual Energy Use

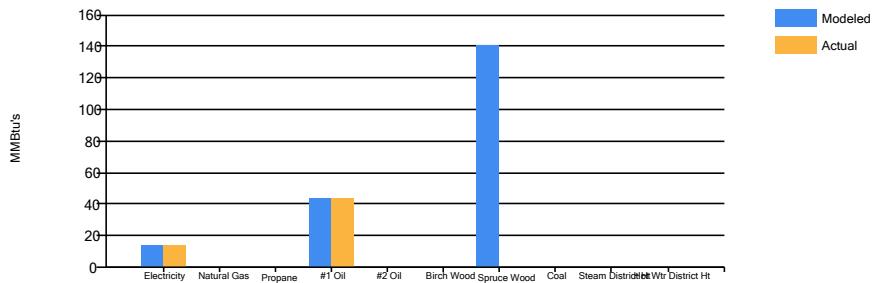


Electricity Use

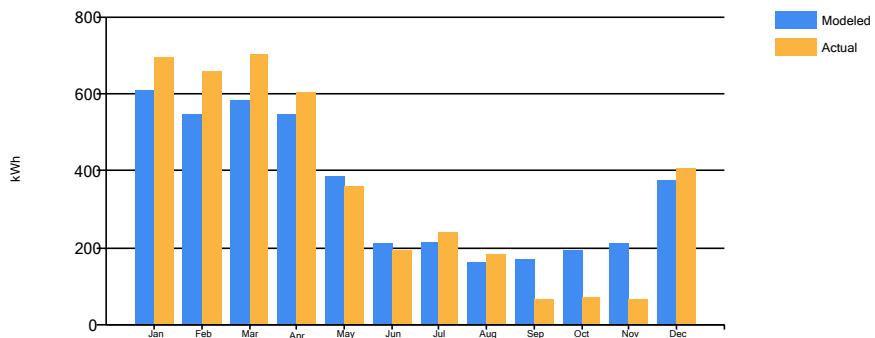

#1 Fuel Oil Use

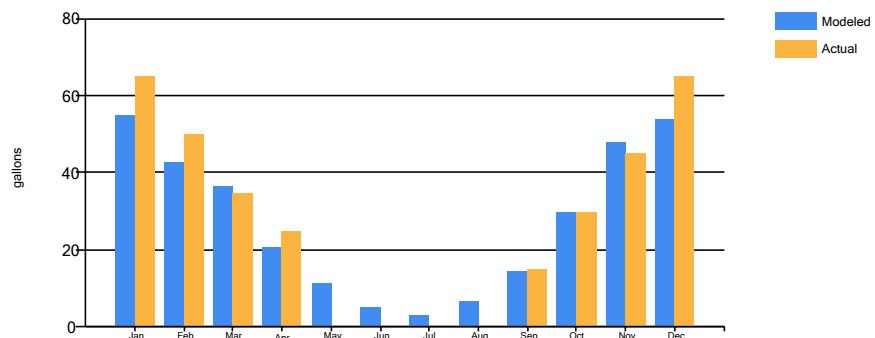

Spruce Wood Use

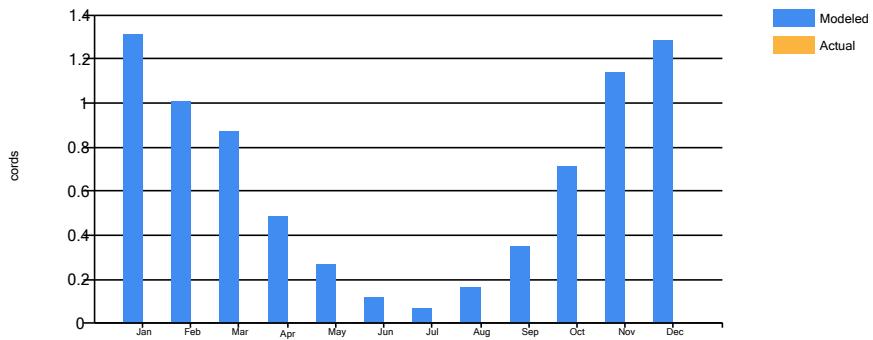

Appendix D - EUI Calculation Details

Electricity for the residential, commercial, and public facilities is provided by the Copper Valley Electric Association.

The average cost for each type of fuel used in this building is shown below in Table 5. This figure includes all surcharges, subsidies, and utility customer charges:

Table 5: Energy Cost Rates for each Fuel Type.

Average Energy Cost	
Description	Average Energy Cost
Electricity	\$ 0.29/kWh
#1 Oil	\$ 2.36/gallons
Spruce Wood	\$ 250/cords

Table 6 shows the calculated results for the building Energy Use Index (EUI), which determines the total energy usage for a type of building for comparison with other buildings of the same type. This allows the user to determine the relative energy use of a building in relation to others of the same type or use.

Table 6: EUI Building Calculations for the Gulkana Shop

Energy Type	Building Fuel Use per Year	Site Energy Use per Year, kBtu	Source/Site Ratio	Source Energy Use per Year, kBtu
Electricity	4,214 kWh	14,381	3.340	48,034
#1 Oil	327 gallons	43,177	1.010	43,608
Spruce Wood	7.78 cords	140,805	1.000	140,805
Total		198,363		232,447
BUILDING AREA		1,157	Square Feet	
BUILDING SITE EUI		171	kBTU/Ft ² /Yr	
BUILDING SOURCE EUI		201	kBTU/Ft²/Yr	
* Site - Source Ratio data is provided by the Energy Star Performance Rating Methodology for Incorporating Source Energy Use document issued March 2011.				

Table 7 shows information on common energy use benchmarks used to characterize the efficiency of a building.

Table 7: Building Benchmarks for the Gulkana Shop

Building Benchmarks			
Description	EUI (kBtu/Sq.Ft.)	EUI/HDD (Btu/Sq.Ft./HDD)	ECI (\$/Sq.Ft.)
Existing Building	171.5	12.76	\$3.40
With Proposed Retrofits	115.4	8.59	\$2.33
EUI: Energy Use Intensity - The annual site energy consumption divided by the structure's conditioned area.			
EUI/HDD: Energy Use Intensity per Heating Degree Day.			
ECI: Energy Cost Index - The total annual cost of energy divided by the square footage of the conditioned space in the building.			

Appendix E – Materials List and Labor Estimation

Table 8 & 9: Materials List and Cost Estimation for Gulkana Shop

Energy Retrofit	Required Materials	Quantity	Cost per Item	Total Materials Cost
Lighting	T8 8ft. LED equivalent lamps	24	\$15	\$360
Lighting	Incandescent A Lamp LED equivalents	1	\$15	\$15
Wall Insulation	R-5 Fiberglass Batt Insulation	1	\$500	\$400
Setback Thermostats	Programmable Thermostat	1	\$200	\$200
Air Tightening	Weather Stripping, Caulking, Window Film	1	\$75	\$75

Category	Cost (\$)
Labor	9,147
Travel	1,490
Materials	1,075
Freight	161
Indirect	1,187
Total	\$13,060

Appendix F – Materials Specifications



LED T8 | T12

[Notify Me when Available](#)

[Large Project? Click here to get a volume quote.](#)



[DESCRIPTION](#)

[SPECIFICATIONS](#)

[REVIEWS](#)

EarthLED Total Product Insight

PERFORMANCE SPECIFICATIONS

REPLACEMENT FOR:

T8 OR T12 4 FOOT FLUORESCENT TUBE

BRIGHTNESS (LUMENS):

2000

COLOR TEMPERATURE:

4000K | 5000K

COLOR ACCURACY (CRI):

80

DIMENSIONS

1.02" X 47.2"

POWER CONSUMPTION:

18 WATTS

VOLTAGE:

120-277 VOLTS

DIMMABLE:

NO

DIMENSIONS / ADDITIONAL DATA

CERTIFICATIONS:

UL, DESIGNLIGHTS (DLC)

PRODUCT/ORDER CODE:

4000K - 18WT8P-4F-40K-BYP

5000K - 18WT8P-4F-50K-BYP

LIFESPAN / COST TO RUN

PROJECTED LIFE:

50,000 HRS

@3 HRS/DAY

YEARLY ENERGY COST:

\$2.17

3 HRS/DAY @ .11 KWH


WARRANTY

5 YEAR THINKLUX LIGHTING LIMITED WARRANTY
EARTHLED PRODUCT PROTECTION PLAN IS AVAILABLE

EarthLED Total Product Insight	
Performance Specifications	
REPLACEMENT FOR:	E12 CANDELABRA
BRIGHTNESS (LUMENS):	500
COLOR TEMPERATURE:	3000K 5000K
COLOR ACCURACY (CRI):	>80
TRADITIONAL WATTAGE EQUIVALENT:	60 WATTS
POWER CONSUMPTION:	7 WATTS
VOLTAGE:	120 VOLTS
DIMMABLE:	YES
MOISTURE RATING:	DAMP
Fixture Rating:	OPEN FIXTURES
BASE TYPE:	E12
ENERGYSTAR QUALIFIED:	YES (TKUCA38S01-7W-D-830-E12)
Dimensions / Additional Data	
BULB DIAMETER:	1.6 IN
MAXIMUM OVERALL LENGTH:	4.9 IN
PRODUCT WEIGHT:	6.7 OUNCES
CERTIFICATIONS:	UL
PRODUCT/ORDER CODE:	3000K - TKUCA38S01-7W-D-830-E12 5000K - TKUCA38S01-7W-D-850-E12
Lifespan / Cost To Run	
PROJECTED LIFE: @3 HRS/DAY	25,000 HRS
YEARLY ENERGY COST: 3 HRS/DAY @ .11 KWH	\$0.84
WARRANTY	3 YEAR THINKLUX LIMITED WARRANTY EARTHLED PRODUCT PROTECTION PLAN IS AVAILABLE



Robertshaw®

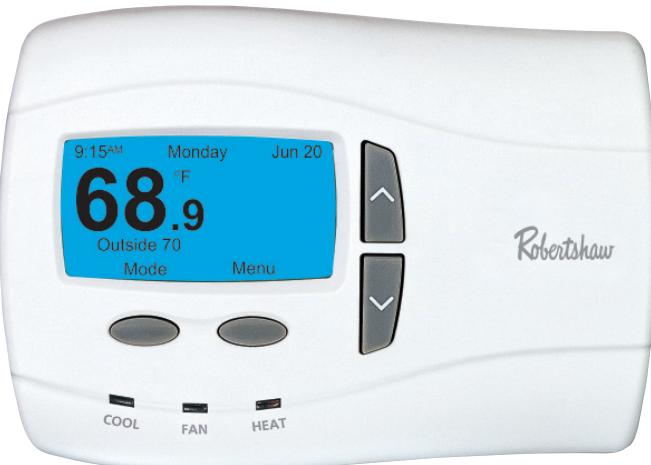

Programming Made Even Easier

Do you want to spend less time installing and setting up thermostats?

The new 9701i2 makes installation even easier with our new Setup Wizard. The Setup Wizard allows you to spend 50% less time setting up the thermostat over competitive models. Plus everything is in plain language so there are no complicated codes or button combinations to memorize.

We've also made programming even easier for your customers. Menus are easier to navigate. We've even added additional convenience features such as Automated Time adjustment for Daylight Saving Time, along with new indoor air quality reminders.

The new 9701i2 is so user friendly, it sets a higher standard in efficiency and simplicity for programmable thermostats. It is truly programming made even easier.

Robertshaw - *Simply the Right Choice™*



9701i2

**DELUXE
PROGRAMMABLE
THERMOSTAT**



Menu Driven Display 1 Heat / 1 Cool

Features and Benefits



Set-up Wizard

Helps speed through the installation process with step-by-step setup and programming instructions.

Trilingual Display Option

Set to your customers' language of choice – English, Spanish or French

Convenient Displays

View a full day of programming at once for quick review or easy adjustment.

Contractor ID Feature

Set it yourself or custom order with your information pre loaded. Your name and phone number remind your customers when service is needed.

Daylight Saving Time Adjustment

Automatically adjusts to correct time regardless of seasonal changes.

Adjustable Backlighting

Choose to have backlighting on at all times or only when programming. You can also adjust the brightness and contrast for improved readability.

Time of Day Zoning

When coupled with a remote sensor (part #9020i), you can control the temperature in remote locations given different scheduled events.

Three Levels of Security

Secure protection against unwanted changes to the programming menus, temperature or set-up functions with your own 4-digit PIN.

Auto Changeover

Automatically adjusts between heating and cooling cycles to maintain optimal comfort.

Worry-Free Memory Storage

Even during power outages, the thermostat maintains set point and programmed parameters.

Adjustable Temperature Offset

Change the displayed temperature from the actual sensed temperature.

Adjustable Temperature Differential

Maintains optimal customer comfort.

Intermittent Fan

Maintains optimal air filtration and circulation with minimal energy use.

An ISO 9001 – 2008 Certified Company

California Title 24 Compliant



5 Year Limited Warranty


24V AC POWERED

Robertshaw®

9701i2

**DELUXE
PROGRAMMABLE
THERMOSTAT**

Terminal Designations

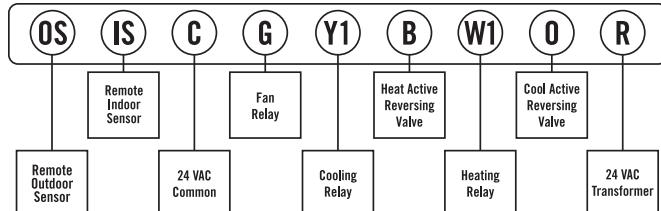

Technical Specifications

Electrical Rating	24 Volt AC (18-30 VAC) 1 amp maximum load per terminal (relay outputs) 3 amp total maximum load (all terminals combined)
Temperature Control Range	45° - 90°F (7° - 32°C)
Accuracy	+/-1.0°F (+/-0.5°C)
Power Source	24 VAC
Auto Changeover Deadband	Selectable 2° to 8°F
Temporary Temperature Override	3 hour maximum or next setpoint
Remote Sensor Capable	1 indoor and 1 outdoor sensor
System Configurations	Single-stage gas, oil or electric heating/cooling systems and single stage heat pump
Terminations	R, W1, Y1, B, O, G, C, IS, OS

Shipping Specifications

Indiv. Ctn. Dim.: 6.625" x 4.25" x 1.625"	Item 9020i and 9025i Remote Sensors
Master Ctn. Qty.: 6	Indiv. Ctn. Dim.: 2.625" x 1.5625" x 4.4375"
Master Ctn. Dim.: 9.25" x 5.625 x 7.5"	Master Ctn. Qty.: 6
Master Ctn. Cu. Ft.: .23	Master Ctn. Dim.: 5.625" x 5.125" x 5.125"
Master Ctn. Wt.: 3.5 lbs.	Master Ctn. Cu. Ft.: .09
Max. Pallet Qty.: 1260	Master Ctn. Wt.: .78 lbs.
Max. Pallet Wt.: 785 lbs.	

Replacement Chart

9701i2	
Braeburn®	5000
Honeywell	TH8110U1003
White-Rodgers	1F95-1271, 1F90-51, 1F90-71, 1F90-371, 1F97-51, 1F97-71, 1F97-371
Carrier	TC-PAC, TC-PHP, P274-1100, P374-1100, P474-1100
Lux	PSPA711

Verify specific application requirements before substitution.

Patent Information

This product is covered by one or more of the following U.S. patents. Foreign patent rights may be pending. 4967382, 5803357, 6502758, 7000849, D301207, D462940

i n v e n s y s™
Controls

191 E. North Avenue
Carol Stream Illinois 60188 USA
Customer Service Telephone 1.800.304.6563
Customer Service Facsimile 1.800.426.0804
HVACCustomerService@InvensysControls.com

For Technical Service
Telephone 1.800.445.8299
Facsimile 1.630.260.7294
TechnicalService@InvensysControls.com

Invensys™, Robertshaw® and Simply the Right Choice™ are trademarks of Invensys plc., its subsidiaries and/or affiliated companies. All other brands mentioned in this report may be the trademarks of their respective owners.




Optional Sensors:
9020i REMOTE INDOOR
9025i REMOTE OUTDOOR

Feature Comparison

	Invensys i2-Series	Honeywell Vision Pro	Carrier Infinity	White-Rodgers 1F97-371
Menu Driven (Ease of Programming)	X			
Installation Wizard	X			
Displays Complete Program	X			
Adjustable Backlighting	X			
Cooling System Monitor	X			
Heating System Monitor	X			
Multi-Language	X			
1/2 Degree Resolution	X			
Time of Day Zoning	X			
5/2 Program	X			X
24 Hour Programming	X			X
7-Day Programming	X	X	X	
Large Display	X	X	X	
Adjustable Timed Override/Hold	X	X		
Automatic Daylight Saving Time Adjustment	X	X		
Adjustable Temperature Limits	X	X		
High/Low Balance Points	X	X		
LED Status Indicators	X	X		
Adjustable Differential	X	X		
Adjustable Compressor Short Cycle Protection	X	X		
Adjustable Residual Cooling	X	X		
Fossil Fuel Kit required on HP units	No	No	Yes	Yes
Battery Free Memory Retention	X		X	
Manual Override	X	X	X	X
Resume	X	X	X	X
Auto Changeover	X	X	X	X
Gas/Electric	X	X	X	X
Single Stage Heat Pump Compatible	X	X	X	X
Line Powered	X	X	X	X
Programmable Fan	X	X	X	X
Intermittent Fan	X		X	
°F and °C	X	X	X	X
12 or 24 Hour	X	X		X
Air Filter Monitor	X	X	X	X
Humidifier Pad Monitor	X	X	X	
UV Light Monitor	X	X	X	
Vacation Setting	X	X	X	X
O & B Terminals	X	X	Partial	X
Events per day	2, 4, 6	4	4	2, 4
Remote Outdoor Sensor	X	Combo	X	X
Remote Indoor Sensor	X		X	X
Energy Efficient Recovery	X	X	X	X
Pre-set Program	X	X	X	X
Hidden Service Level	X	X	X	
Security Key Pad	X			X
Temperature Recalibration	X	X	X	
Customizable Contractor ID	X			Factory Only

www.RobertshawTstats.com
www.InvensysControls.com
 ©2009 Invensys Controls 10/09 - 150-1978B

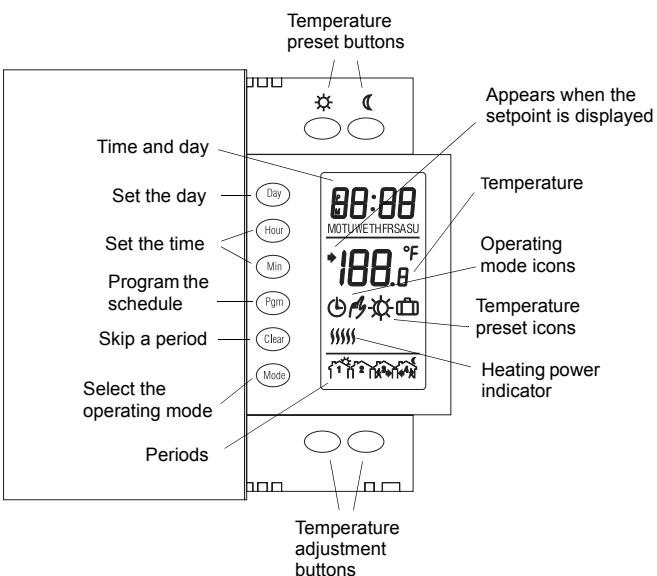

1 Description

This programmable thermostat can be used to control an electric heating system such as an electric baseboard heater, a radiant ceiling, a radiant floor, a convector, etc.

The thermostat cannot be used under the following conditions:

- The resistive load is greater than 16.7 A
- The resistive load is less than 2 A
- The system is driven by a contactor or relay (inductive load)
- The system is a central heating system

SUPPLIED PARTS:

- One (1) thermostat
- Two (2) 6-32 screws
- Two (2) solderless connectors

2 Installation


TURN OFF POWER TO THE HEATING SYSTEM AT THE MAIN POWER PANEL TO AVOID ELECTRICAL SHOCK.

THE INSTALLATION MUST BE PERFORMED BY AN ELECTRICIAN.


- ▶ All cables and connections must conform to the local electrical code.
- ▶ Special CO/ALR solderless connectors must be used when connecting with aluminum conductors.
- ▶ Install the thermostat onto an electrical box.
- ▶ Install the thermostat about 5 feet high, on an inside wall facing the heater.
- ▶ Avoid locations where there are air drafts (such as the top of a staircase or an air outlet), dead air spots (such as behind a door), or direct sunlight.
- ▶ Do not install the thermostat on a wall that conceals chimney or stove pipes.
- ▶ The thermostat wires are not polarized; either wire can be connected to the load or to the power supply.

NOTE: Always keep the thermostat's vents clean and unobstructed.


①

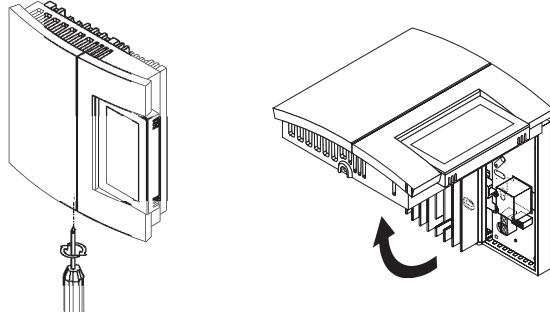


- ② Connect the thermostat wires to the line wires and to the load wires using solderless connectors for copper wires.

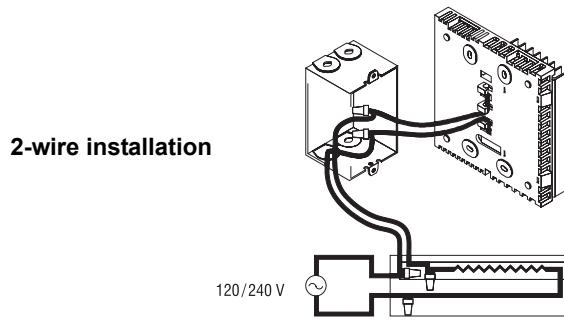

4-wire installation

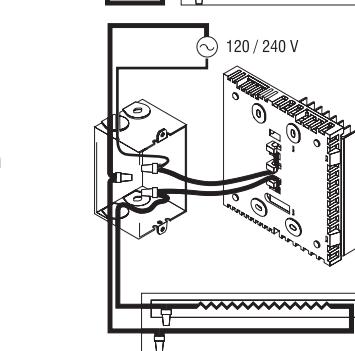

- ③ Push any excess wire back into the electrical box.

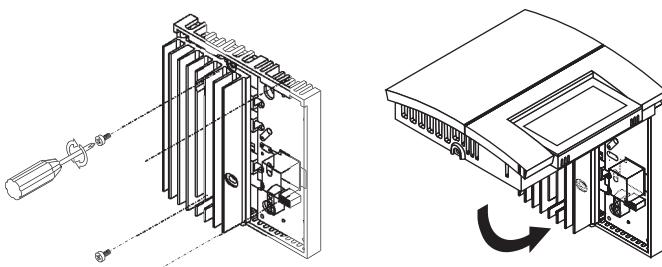


NOTE: If necessary, before re-installing the front component, configure the thermostat (see section 3).

- ④ Return power to heating system.

3 Configuration

The configuration switches are on the back of the thermostat. The factory settings are indicated by the gray cells in the following table.



SW1	Early Start ^a	Off	On
SW2	Temperature / time format ^b	°C / 24-hour	°F / 12-hour
SW3	Cycle length ^c	15 seconds	15 minutes
SW4	Not used	-	-

- a. Early Start can be used in Automatic mode only. When this function is enabled, the thermostat calculates the optimal time to start heating in order to obtain the desired temperature by the set time. The thermostat re-assesses the start time daily based on the previous day's performance.
- b. If you change the temperature display format, the preset temperatures (\odot , \odot and \square) will return to their default settings.
- c. 15-second cycles should be selected in most cases as it provides better temperature control. 15-minute cycles must be selected if you have a fan-equipped heater or if 15-second cycles causes light flickering (especially in rural regions).

4 Power-up

Upon power-up, the thermostat is in manual mode (flame) and displays the actual (ambient) temperature.

- 1 Press the **Hour** and **Min** buttons to set the thermostat's clock.
- 2 Press the **Day** button to set the day.

5 Temperature Setting

Setpoint

The thermostat normally displays the actual temperature. To view the setpoint, press the \uparrow or \downarrow button briefly. The setpoint will appear for the next 5 seconds.

To change the setpoint, press the \uparrow or \downarrow button until the desired temperature is displayed. To scroll faster, hold the button.

Using a preset temperature

The thermostat has 3 preset temperatures:

- Comfort temperature \odot
- Economy temperature \odot
- Vacation temperature \square

Icon	Intended use	Factory setting
\odot	Comfort (when at home)	21°C (70°F)
\odot	Economy (when asleep or away from home)	16.5°C (62°F)
\square	Vacation (during prolonged absence)	10°C (50°F)

- To use the Comfort or Economy temperature, press the \odot or \odot button respectively. The corresponding icon will be displayed.
- To use the Vacation temperature, press both \odot and \odot buttons simultaneously. The \square icon will be displayed.

Storing a preset temperature

To store the Comfort or Economy temperature:

Set the desired temperature using the \uparrow or \downarrow button. Press and hold the appropriate button (\odot or \odot) for approximately 3 seconds until the corresponding icon is displayed. Press the **Mode** button.

To store the Vacation temperature:

Set the desired temperature using the \uparrow or \downarrow button. Press and hold both \odot and \odot buttons simultaneously for approximately 3 seconds until the \square icon is displayed. Press the **Mode** button.

6 Operating Modes

\odot **Automatic** - The temperature is set according to the programmed schedule. To place the thermostat in this mode, press **Mode** until \odot is displayed. The icons of the current period and preset temperature are also displayed.

Temporary Bypass: If you modify the setpoint (by pressing the \uparrow , \downarrow , \odot or \odot button) when the thermostat is in automatic mode, the new setpoint will be used until the end of the current period. When the next period starts, the temperature set for that period becomes the new setpoint.

flame **Manual** - The programmed schedule is not used. The temperature must be set manually. To place the thermostat in this mode:

- 1 Press **Mode** until flame is displayed.
- 2 Set the temperature using the \uparrow , \downarrow , \odot or \odot button.

7 Schedule

The schedule consists of 4 periods per day which represents a typical weekday. You can program the thermostat to skip the periods that do not apply to your situation. For example, you can skip periods 2 and 3 for the weekend.

Period	Description	Associated temperature preset
$\odot\odot$	Wake	\odot
$\odot\odot\odot$	Leave	\odot
$\odot\odot\odot\odot$	Return	\odot
$\odot\odot\odot\odot\odot$	Sleep	\odot

The Comfort (\odot) temperature is used in periods 1 and 3 and the Economy (\odot) temperature is used in periods 2 and 4. For example, when the period changes from 1 to 2, the setpoint automatically changes from Comfort setting (\odot) to Economy setting (\odot).

You can have a different program for each day of the week; i.e., each period can start at different time for each day of the week. The thermostat has been programmed with the following schedule.

Period	Setting	MO	TU	WE	TH	FR	SA	SU
$\odot\odot$	\odot	6:00 AM						
$\odot\odot\odot$	\odot	8:00 AM	--:--	--:--				
$\odot\odot\odot\odot$	\odot	6:00 PM	--:--	--:--				
$\odot\odot\odot\odot\odot$	\odot	10:00 PM						

To modify the schedule:

- 1 Press **Pgm** to access the programming mode. Period 1 is selected.
- 2 Press **Day** to select the day to program (hold for 3 seconds to select the entire week).
- 3 Press **Hour** and **Min** to set the start time of the selected period, or press **Clear** if you want to skip the period (--:-- is displayed).
- 4 Press **Pgm** to select another period, or press **Day** to select another day. Then repeat step 3.

5 Press **Mode** to exit the programming mode.

NOTE: If no button is pressed for 60 seconds, the thermostat will automatically exit the programming mode.

8 Power Outage

During a power outage, the settings are stored in memory. However, only the thermostat's clock must be re-adjusted if the power failure lasts more than 2 hours. When power comes back, the thermostat will return to the operating mode that was active prior to the power failure.

9 Troubleshooting

PROBLEM	SOLUTIONS
Thermostat is hot.	This condition is normal. Under normal operation, the thermostat housing can reach a temperature between 35°C (95°F) and 40°C (104°F).
Heater is always On.	The thermostat has not been correctly wired.
Thermostat indicates that heating is On, but the heater is not On.	The thermostat has not been correctly wired.
Wrong temperature is displayed.	The thermostat is exposed to air draft. Eliminate the draft. The sticker on the thermostat's screen has not been removed.
Wrong time is displayed.	The thermostat was without power for more than 2 hours.
Temperature does not change according to the programmed schedule.	Check that the thermostat is in Automatic mode. Check the schedule and clock settings.
Display disappears and reappears after a few minutes.	The thermal protection device on the heater is open. This can happen after a power failure or if the heater is obstructed by furniture or curtains.
Display looks faded when heating is activated	The heating system is less than the required minimum load. This thermostat cannot be used below that rating.

10 Technical Specifications

Power: 120/240 VAC, 50/60 Hz

Minimum load: 2 A (resistive only)

500 W @ 240 VAC

250 W @ 120 VAC

Maximum load: 16.7 A (resistive only)

2000 W @ 120 VAC

4000 W @ 240 VAC

Display range: 0°C to 60°C (32°F to 140°F)

Display resolution: 0.5°C (1°F)

Setpoint range: 5°C to 30°C (40°F to 86°F)

Setpoint interval: 0.5°C (1°F)

Storage: -20°C to 50°C (-4°F to 120°F)

Approval: c UL us



Warranty

Aube warrants this product, excluding battery, to be free from defects in the workmanship or materials, under normal use and service, for a period of three (3) years from the date of purchase by the consumer. If at any time during the warranty period the product is determined to be defective or malfunctions, Aube shall repair or replace it (at Aube's option).

If the product is defective,

(i) return it, with a bill of sale or other dated proof of purchase, to the place from which you purchased it, or

(ii) contact Aube. Aube will make the determination whether the product should be returned, or whether a replacement product can be sent to you.

This warranty does not cover removal or reinstallation costs. This warranty shall not apply if it is shown by Aube that the defect or malfunction was caused by damage which occurred while the product was in the possession of a consumer.

Aube's sole responsibility shall be to repair or replace the product within the terms stated above. AUBE SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND, INCLUDING ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING, DIRECTLY OR INDIRECTLY, FROM ANY BREACH OF ANY WARRANTY, EXPRESS OR IMPLIED, OR ANY OTHER FAILURE OF THIS PRODUCT. Some provinces and states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation may not apply to you.

THIS WARRANTY IS THE ONLY EXPRESS WARRANTY AUBE MAKES ON THIS PRODUCT. THE DURATION OF ANY IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IS HEREBY LIMITED TO THE THREE-YEAR DURATION OF THIS WARRANTY. Some provinces and states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

This warranty gives you specific legal rights, and you may have other rights which vary from province or state to another.



Customer Assistance

If you have any questions about the product installation or operation, or concerning the warranty, contact us at:

705 Montrichard
Saint-Jean-sur-Richelieu, Quebec
J2X 5K8
Canada

Tel.: (450) 358-4600

Toll-free: 1-800-831-AUBE

Fax: (450) 358-4650

Email: aube.service@honeywell.com

For more information on our products, go to
www.aubetech.com



As an ENERGY STAR® partner, Aube Technologies has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

R-19 Kraft Faced Insulation Batts 23 in. x 93 in.



- Soft to touch, pre-cut widths to fit between studs and joists
- Greenguard GOLD certified & verified to be Formaldehyde free
- Offers exceptional thermal and sound control performance

\$88.20 / each

If you buy **15** or more

\$61.74 / each

Quantity

Product Overview

EcoTouch insulation is the reinvention of fiberglass insulation from Owens Corning, the industry leader that invented fiberglass insulation. Install our insulation with confidence knowing that over 70 years of innovation and experience has gone in the making of EcoTouch insulation. Unlike traditional fiberglass insulation, Owens Corning EcoTouch insulation contains more than 99% natural ingredients consisting of minerals and plant-based compounds and is verified to be formaldehyde free. Owens Corning EcoTouch insulation is third-party certified to include a minimum of 65% total recycled content for unfaced insulation and 58% for kraft faced insulation. Owens Corning EcoTouch insulation helps to control sound and temperature - keeps your home warm in the winter and cool in the summer.

- Dimensions: 6-1/4 in. x 23 in. x 93 in., 8 pieces (118.83 sq. ft. / bag)
- Application: 2 in. x 6 in. walls (Interior / exterior), floors
- Completely fills the cavity, eliminating gaps and the need for additional handwork
- Provides thermal performance and helps lower monthly heating / cooling costs
- EcoTouch insulation helps control sound; add to bedrooms, home office, family room, utility room, kitchen and bathroom
- Can be combined with FOAMULAR insulating sheathing to achieve greater R-value in exterior wall applications

Specifications

Dimensions

Coverage Area (sq. ft.)

118.83

Product Depth (in.)

93

Product Height (in.)

6.25

Product Length (ft.)

7.75 ft

Product Thickness (in.)

6.25 in

Product Width (in.)

23

Details

Faced or Unfaced

Faced

Formaldehyde Free

Yes

Insulation Application Type

2x6 Walls,Crawlspaces,Floors

Insulation R-Value

19

Insulation Type

Fiberglass

Product Weight (lb.)

34lb

Roll or Batt

Batt

Vapor Retardant

Yes

Warranty / Certifications

Warranty Information

Limited Lifetime



INNOVATIONS FOR LIVING®

EcoTouch® PINK® FIBERGLAS™ Insulation

Manufacturers Fact Sheet

This fact sheet contains important details about Owens Corning's™ **EcoTouch® PINK® FIBERGLAS™ Insulation**. Read it carefully. The chart below covers the entire line of EcoTouch® products sold under the names Thermal Batt, FastBatt, Cathedral Batt, Basement Blanket™, Sound Attenuation Batt (SAB) and Sonobatts®. The chart includes all products, both unfaced and faced with Kraft paper, foil, polyethylene ("Poly"), FSK or PSK.

EcoTouch® PINK® FIBERGLAS™ Insulation

R-value	Thickness (inches)	Width (inches)	Length (inches)	Piece Sq. Ft.	Pieces/ Package	Package Sq. Ft.
8	2.5	16	96	10.7	20	213.3
8	2.5	24	96	16.0	20	320.0
11	3.5	15	93	9.7	16	155.0
11	3.5	15	94	9.8	9	88.1
11	3.5	15	105	10.9	16	175.0
11	3.5	16	96	10.7	16	170.7
11	3.5	23	93	14.9	16	237.7
11	3.5	23	96	15.3	16	245.3
11	3.5	24	48	8.0	32	256.0
11	3.5	24	96	16.0	16	256.0
11	3.5	48	720	240.0	1	240.0
13	3.5	11	93	7.1	22	156.3
13	3.5	15	93	9.7	10	96.9
13	3.5	15	93	9.7	11	106.6
13	3.5	15	93	9.7	13	125.9
13	3.5	15	105	10.9	12	131.3
13	3.5	15	94	9.8	9	88.1
13	3.5	15.25	93	9.8	12	118.2
13	3.5	15.25	93	9.8	13	128.0
13	3.5	15.25	105	11.1	12	133.4
13	3.5	16	96	10.7	11	117.3
13	3.5	16	96	10.7	13	138.7
13	3.5	19.25	93	12.4	11	136.8

Read This Before You Buy

What you should know about R-Values

The chart shows the R-values of this insulation. R means resistance to heat flow. The higher the R-value, the greater the insulating power. Compare insulation R-values before you buy.

There are other factors to consider. The amount of insulation you need depends mainly on the climate you live in. Also, your fuel savings from insulation will depend on the climate, the type and size of house, the amount of insulation already in your house, and your fuel-use patterns and family size. If you buy too much insulation, it will cost you more than what you'll save on fuel.

To get the marked R-value, it is essential that this insulation be installed properly.

EcoTouch® PINK® FIBERGLAS™ Insulation

R-value	Thickness (inches)	Width (inches)	Length (inches)	Piece Sq. Ft.	Pieces/ Package	Package Sq. Ft.
13	3.5	23	93	14.9	11	163.4
13	3.5	24	48	8.0	24	192.0
13	3.5	24	96	16.0	11	176.0
13	3.5	24	96	16.0	12	192.0
13	3.5	48	480	160.0	1	160.0
15	3.5	11	93	7.1	14	99.5
15	3.5	15	93	9.7	7	67.8
15	3.5	15	93	9.7	8	77.5
15	3.5	15	105	10.9	7	76.6
15	3.5	15	105	10.9	8	87.5
15	3.5	16	96	10.7	7	74.7
15	3.5	16	96	10.7	8	85.3
15	3.5	23	93	14.9	7	104.0
15	3.5	24	96	16.0	7	112.0
19	6.25	11	93	7.1	16	113.7
19	6.25	15	48	5.0	16	80.0
19	6.25	15	93	9.7	8	77.5
19	6.25	15	94	9.8	5	49.0
19	6.25	15	105	10.9	8	87.5
19	6.25	15	470	49.0	1	49.0
19	6.25	15.25	93	9.8	8	78.8
19	6.25	15.25	105	11.1	8	89.0
19	6.25	16	48	5.3	16	85.3
19	6.25	16	96	10.7	8	85.3
19	6.25	19.25	48	6.4	16	102.7
19	6.25	19.25	93	12.4	8	99.5
19	6.25	19.25	96	12.8	8	102.7
19	6.25	23	48	7.7	16	122.7
19	6.25	23	93	14.9	8	118.8
19	6.25	23	94	15.0	5	75.1
19	6.25	23	96	15.3	8	122.7
19	6.25	23	470	75.1	1	75.1
19	6.25	24	48	8.0	16	128.0
19	6.25	24	96	16.0	8	128.0
19	6.25	48	470	156.7	1	156.7
19	6.25	48	480	160.0	1	160.0
21	5.5	15	93	9.7	7	67.8
21	5.5	15	93	9.7	8	77.5
21	5.5	15	105	10.9	8	87.5
21	5.5	16	96	10.7	7	74.7
21	5.5	23	93	14.9	6	89.1
21	5.5	24	96	16.0	7	112.0
22	6.75	15	48	5.0	14	70.0



INNOVATIONS FOR LIVING®

EcoTouch® PINK® FIBERGLAS™ Insulation

Manufacturers Fact Sheet

EcoTouch® PINK® FIBERGLAS™ Insulation

R-value	Thickness (inches)	Width (inches)	Length (inches)	Piece Sq. Ft.	Pieces/ Package	Package Sq. Ft.
22	6.75	23	48	7.7	14	107.3
22	6.75	24	48	8.0	14	112.0
25	8	19.25	96	12.8	6	77.0
25	8	23	96	15.3	6	92.0
25	8	16	96	10.7	6	64.0
25	8	16	48	5.3	12	64.0
25	8	24	96	16.0	6	96.0
30	9.5	12	48	4.0	20	80.0
30	9.5	15	48	5.0	10	50.0
30	9.5	15	300	31.3	1	31.3
30	9.5	16	48	5.3	10	53.3
30	9.5	16	48	5.3	11	58.7
30	9.5	19.25	48	6.4	10	64.2
30	9.5	23	300	47.9	1	47.9
30	9.5	24	48	8.0	10	80.0
30	9.5	24	48	8.0	11	88.0
30	8.25	15.5	48	5.2	11	56.8
30	8.25	23.75	45	7.4	10	74.2
30	8.25	23.75	48	7.9	10	79.2
38	12	16	48	5.3	8	42.7
38	12	19.25	48	6.4	8	51.3
38	12	24	48	8.0	8	64.0
38	10.25	15.5	48	5.2	8	41.3
38	10.25	23.75	48	7.9	8	63.3

Please contact 419-248-6557 for additional information. Email: gettech@owenscorning.com

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.



INNOVATIONS FOR LIVING®

OWENS CORNING INSULATING SYSTEMS, LLC

ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK®

www.owenscorning.com


Pub. No. 10017881. Printed in U.S.A. December 2012. THE PINK PANTHER™ & ©1964-2012 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2012 Owens Corning. All Rights Reserved.



Window Jambs and Light-Duty Door Jambs

RUBBER SEAL

Part Number Example

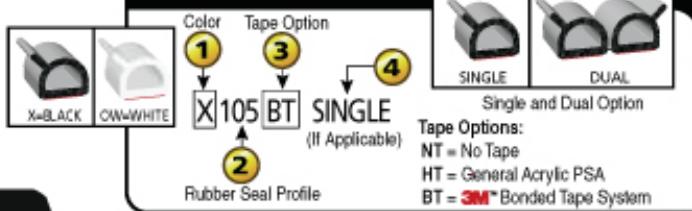

"D" SECTIONS

 X2476	 X1333	 OW1333	 X1153	 X1543	 X110
 X109	 OW109	 X2507	 X119	 X125	 OW125
 X2373	 X135	 OW135	 X1750		 X2576
 X105	 X202	 OW202	 X101		 X2338

See page 42 for tape options

1-888-874-6565


TRIM-LOK® INC.
www.trimlok.com

RUBBER SEAL



"D" SECTIONS

SEALS

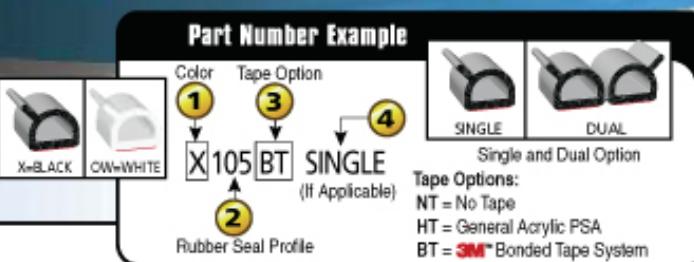

X108	OW108	X2012HT	X5381	X1458
X5272	X2828	OW2828	X2492	X1613
X1689	X2471	X1712		X1524
X2463	X1921	X5036		X2354

RUBBER SEAL




X1678




X1655



2495




X2337




X2529


TRIANGLE SECTIONS




X2123




X2532



X2025



X1711



X1923

Adhesive Options – Choose the tape that fits your needs

"HT" GENERAL PURPOSE PRESSURE SENSITIVE ADHESIVE

This acrylic based adhesive is best used to hold the rubber seal in place while installed in a static application or compressed between two stationary objects. May be used in some light duty dynamic applications against a variety of substrates. Good heat performance -20°F. to +158°F.



Please Note: During application ambient temperature must be above 60°F.

"BT" 3M™ HIGH STRENGTH TAPE SYSTEM

The ultimate bond between the rubber and substrate. Creates a moisture barrier and air tight seal between rubber and substrate. Highest peel and shear resistance, can be used under high loads of stress and force. Has low initial tack for easy re-positioning during installation and requires 72 hours of cure time for full bond strength. Good heat performance -20°F. to +158°F.



See our How to Install video at:
www.rubber-seal-install.info



PEDESTAL SEALS



DD6109



DD1604

See page 42 for tape options

1-888-874-6565

TRIM-LOK® INC.
www.trimlok.com

Door Bottom Sweep

(Replacement for Damaged Brush Sweep)

M-D Building Products, Inc. > Products > DB006 Commercial Grade Door Sweep - 1-1/4" EPDM - 36"

Product Search

Search by name, model, or upc.



DB006 Commercial Grade Door Sweep - 1-1/4" EPDM - 36"

This heavy duty commercial grade door sweep provides years of service in high traffic applications. Heavy rubber seal stands up to the elements. Fasteners are included.

SKU: 68247 CATEGORIES: [DOOR SEALS](#), [WEATHERIZATION & THRESHOLDS](#)

[WHERE TO BUY](#)

Door Bottom Sweep

(For Doors w/ Very Large Gaps and/or Damaged Bottom Edges)

 Toll Free **1.800.654.8454**

[Home](#) [Products](#) [How We Can Help](#) [About](#) [Contact Us](#)

M-D BUILDING PRODUCTS

Interactive Product Catalog

M-D Building Products, Inc. > Products > DB054 Door Bottom - 1-3/4" Vinyl - 36"

Product Search

Search by name, model, or upc. 

 A long, rectangular door bottom sweep made of vinyl, shown with its mounting hardware (screws) below it.

DB054 Door Bottom - 1-3/4" Vinyl - 36"

Energy loss through the bottom of doors can be minimized with the installation of a door bottom in conjunction with your smooth top threshold. This combination provides a weatherproof seal between the bottom of the door and the top of the threshold. Drip caps also provide your exposed entry ways protection by diverting water away from the door bottom and thresholds. M-D Building Products offers multiple combinations of new and replacement door bottoms and drip caps that will fit most entry doors.

SKU: 68593 CATEGORIES: [DOOR SEALS](#), [WEATHERIZATION &](#)

Door Bottom Sweep

(Lower Profile)

M-D Building Products, Inc. Toll Free **1.800.654.8454**

Home Products How We Can Help About Contact Us

Interactive Product Catalog

M-D Building Products, Inc. > Products > DB002 U-Shaped Door Bottom w/Drip Cap - 1-3/8" x 36"

Product Search



DB002 U-Shaped Door Bottom w/Drip Cap - 1-3/8" x 36"

Energy loss through the bottom of doors can be minimized with the installation of a door bottom in conjunction with your smooth top threshold. This combination provides a weatherproof seal between the bottom of the door and the top of the threshold. Drip caps also provide your exposed entry ways protection by diverting water away from the door bottom and thresholds. M-D Building Products offers multiple combinations of new and replacement door bottoms and drip caps that will fit most entry doors.

SKU: 80630 CATEGORIES: **DOOR SEALS, WEATHERIZATION & THRESHOLDS**

Chat ^

Door Top and Side Jambs

M-D BUILDING PRODUCTS
 catalog

Toll Free 1.800.654.8454

Home Products How We Can Help About Contact Us

M-D Building Products, Inc.

> Products

> Cinch Door Seal Tops and Sides 42" Silver

Product Search

Search by name, model, or upc. 



Cinch Door Seal Tops and Sides 42" Silver

Cinch™ Door Seal Top & Sides is a fast and easy way to save money by sealing your doors against drafts and leaks. Say goodbye to drills, screws, screwdrivers or pilot holes. Simply measure, trim, peel and stick your way to energy savings in any season. Specially developed with 3M™ Adhesive Technology, Cinch installs in mere minutes and lasts for years.

SKU: 43303 CATEGORIES: DOOR SEALS, WEATHERIZATION & THRESHOLDS TAGS: AIR-TIGHT, CINCH, ENERGY SAVINGS

WHERE TO BUY

 Chat



Bottom of Garage Doors



For Questions or Concerns, Please Call

(800) 992-2018

ProSeal™ U-shaped Garage Door Bottom Seal Installation Instructions


1. Remove existing garage door bottom seal. Some garage door manufacturers will pinch the aluminum track to hold the bottom seal in place. To open a pinched track, insert a flathead screw driver, into the end of the track, and gently pry open the end, just enough to allow removal of the old door seal. Both ends of the track may need to be opened.

2. Make sure any debris in the track has been removed and that it is clean and dry. Straighten out any cramps in the track.

Quick Tip: Mix a bucket of water with some liquid dish soap or liquid laundry detergent. Place the seal in the soapy water and pull it out as you install it into the track.

3. Starting at either end of the garage door, insert the $\frac{1}{4}$ " T-ends, attached to the ProSeal™ Garage Door Bottom Seal, into the track. Next, slide the ProSeal™ into the track, until it reaches the opposite side. Continue to pull the seal until you have approximately 2" protruding beyond the end of the track.

4. Leave 2" protruding on both sides, then use scissors to trim off the excess ProSeal™. If your door seal track was pinched and you wish to pinch it back together, use pliers to gently pinch the track back into place. Now tuck the 2" of excess seal back into the U-shaped opening. This will lock the seal in place.



6345 Nancy Ridge Drive, San Diego, CA 92121
(858) 625-0005 • (800) 992-2018 • Fax (858) 625-0010 • Email: info@auto-care.com



Top and Sides of Garage Doors



Roll over image to zoom in

Pemko Brush Gasketing/Door Bottom, 45-degree, Clear Anodized Aluminum with 0.625" Gray Nylon Brush insert, 0.31" width, 0.25" Height, 72" Length

[Be the first to review this item](#)

Price: **\$23.35** & [FREE Shipping](#) on orders over \$25—or get [FREE Two-Day Shipping](#) with [prime](#)

Usually ships within 1 to 2 months.

Ships from and sold by Amazon.com.

[New \(1\) from \\$23.35](#) & FREE shipping on orders over \$25.00. [Details](#)

Specifications for this item

Part Number	45061CNB72	Height	0.25 inches
Number of Items	1	Length	72 inches
UPC	086787113621	Material	Aluminum
Brand Name	Pemko	Model Number	45061CNB72
		Width	0.31 inches

Product features

- All brush seals greatly reduce the infiltration of light, air, wind, rain, and snow; prevent heat loss; control the penetration of smoke and fumes.
- The dense nylon filaments conform to the contours of every sealing surface, providing a superior seal with extremely low closing force.
- Brush remains flexible down to -40°F and has a melting point above 400°F.
- UV stabilized, dependable, long-lasting, cost-effective.
- All clear anodized brush products are supplied with gray brush

Product description

Brush Perimeter seals are designed to seal the gap between the door and the door jamb. They are surface mounted to the frame and are usually supplied with an angled flange. The angled flange provides the best contact between the brush and the surface of the door.

Product details

Shipping Weight: 9.6 ounces ([View shipping rates and policies](#))

Domestic Shipping: Currently, item can be shipped only within the U.S. and to APO/FPO addresses. For APO/FPO shipments, please check with the manufacturer regarding warranty and support issues.

International Shipping: This item is not eligible for international shipping. [Learn More](#)

ASIN: B00BU8TLNS

Item model number: 45061CNB72

Average Customer Review: [Be the first to review this item](#)

Amazon Best Sellers Rank: #754,396 in Industrial & Scientific ([See Top 100 in Industrial & Scientific](#))

#144 in [Industrial & Scientific](#) > [Commercial Door Products](#) > [Commercial Door Hardware](#) > [Trims, Seals & Gaskets](#)

Manufacturer's warranty can be requested from customer service. [Click here](#) to make a request to customer service.